

Product Overview

Festoon-Systems for I-Beams



CONDUCTIX
wampfler

Ⓞ DELACHAUX GROUP



TERMINAL BURCHARDKAI

TERMINAL BURCHARDKAI

NAUTIC
LIMASSOL

Count on it!

We move your business: wherever you see objects and people in movement, you will find tailor-made Conductix-Wampfler solutions for the flexible transfer of energy, data and media.

What makes Conductix-Wampfler truly remarkable are its years of experience and comprehensive know-how in the development and production of festoon systems. These systems carry flat and round cables for the transfer of electrical energy and data. Hoses are also carried for the directing of fluids, air or gases.

Conductix-Wampfler festoon systems are employed worldwide in steel mills, ports, zinc coating shops and compost preparation facilities, to name a few applications. Perfected technology and standardization in modular design ensure an above-average operational life of the systems, even in the roughest of environments.



Carrying a heavy load!
Motorized cable trolley system **program 0380** in combination with **program 0375** on a STS-container crane.

Assemblies are easily done on site and within the shortest amount of time; service and maintenance are quick and easy. Conductix-Wampfler festoon systems save time and minimize costs throughout their operational life.

As a system supplier, Conductix-Wampfler offers its customers a comprehensive all around service. This includes the delivery of the components, such as the cable trolley, towing trolley and end clamp. We also offer you competent consulting, the planning of the overall system, the selection and acquisition of the optimal cables and equipment, the right logistical concept and on-site commissioning.

Therefore important data and required energy arrive safely, reliably and permanently wherever they're needed.

All over the world!
Count on it!



Open the gates!
Cable trolley system **program 0330** on a lock



Everything from one source:
The right cables are always a given at Conductix-Wampfler!




On the go!
Cable trolley system **program 0350** on a steel mill overhead bridge crane

Complete overview of cable trolleys

Program 0314 – 0385 for I-Beams

The Conductix-Wampfler product range covers cost-efficient cable trolleys made of plastic for the most basic applications all the way up to motorized cable trolleys with frequency converter control and patented drive concept for heavy dynamic loads.

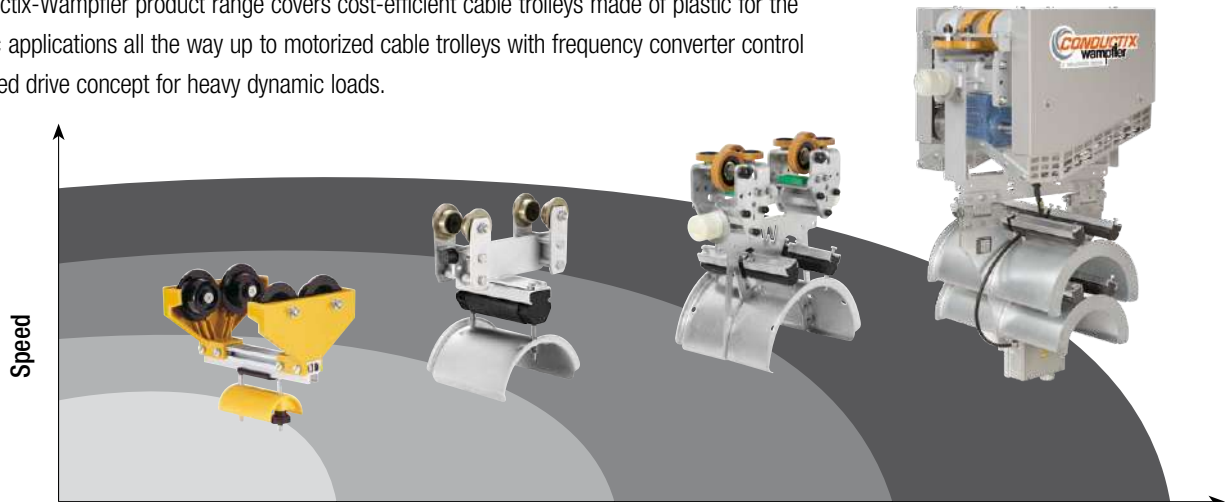

| | | | | | Load capacity | | | | | | |
|----------------------|--|---|--|--|--|--|--|--|--|--|--|
| Design | For low mechanical and dynamic loads | For medium mechanical and dynamic loads | | | For high mechanical and dynamic loads | | | For maximum mechanical and dynamic loads | | | |
| Typical applications | Monorail hoists and overhead bridge cranes | Standard and special overhead bridge cranes as well as conveyor systems | | | Ladle cranes, grab cranes, container cranes as well as high-speed conveyor systems | | | Ladle cranes, grab cranes, container cranes as well as high-speed conveyor systems | | | |

| | | | | | | | | | | |
|---|---------------------|---------------------|---------------------|---------------------|-------------|--------------|--------------|-------------|--------------|----------------------------|
| Festoon-System | 0314 | 0320 | 0325 | 0330 | 0350 | 0360 | 0365 | 0370 | 0375 | 0380 0385 |
| Cable weight per cable trolley max. (kg)* | 20 | 80 | 125 | 200 | 350 | 500 | 350 | 350 | 800 | 800 |
| Speed max. (m/min) | 50 | 100 | 120 | 150 | 160 | 160 | 300** | 210 | 300** | 300 |
| Suitable cable type | Flat / Round | Flat / Round | Flat / Round | Flat / Round | Flat | Round | Round | Flat | Round | Round |
| Multiple saddle | | ○ | ○ | ○ | ○ | ○ | | ○ | ○ | ○ |
| Motorized | | | | | | | | | | ○ |


| | | | | | | | | | | |
|--|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|
| | Page 6 | Page 8 | Page 9 | Page 10 | Page 12 | Page 13 | Page 15 | Page 16 | Page 17 | Page 19 |
|--|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|

*depending on roller size/roller material | **in combination with motorized trolleys

Program 0314


Center-loading **flat or round cable trolleys** made of plastic for lighter cable selections. Flanged guided plastic rollers for simple I-beam applications. Two, three and four rollers.

These cable trolleys generally run on the same I-beam as the electricity-powered consumer.

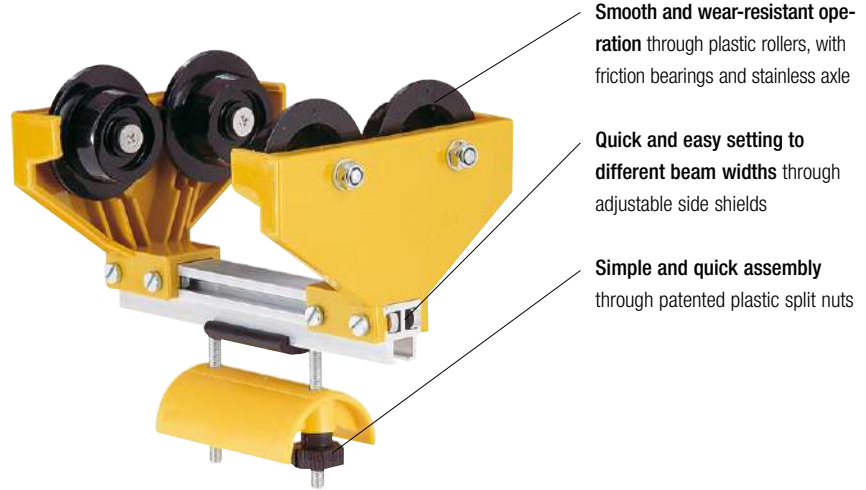

Main applications:

- Electric chain hoists, e.g., on swiveling cranes
- Travelling hoists
- Standard cranes
- Transport systems
- Electricity and air supply for machinery



Standard application data

| | |
|-------------------------|---|
| Max. travel speed | 50 m/min |
| Max. load capacity | 20 kg* |
| Main rollers | diameter: 40 mm design: flanged rollers material: polyamide |
| Ambient temperature | -20°C ... +60°C |
| Applications | indoor / outdoor |
| Acid-proof design | possible |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller arrangement







Program 0320

Compact **round** or **flat cable trolleys**, center-loading, made of galvanized steel for medium speeds and cable weights.

Main applications:


- Standard bridge cranes
- Conveyor systems
- Electric hoist units
- Transport systems

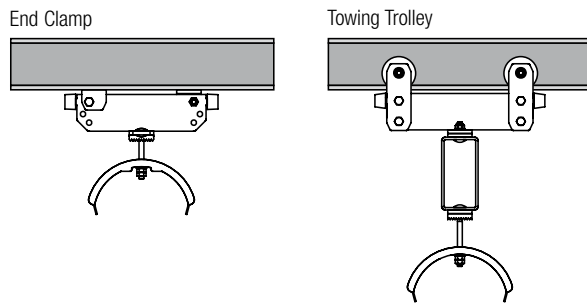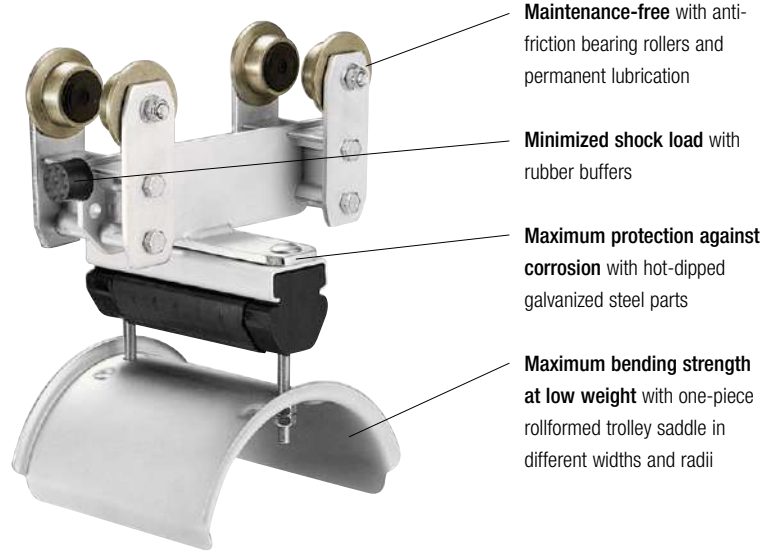

Standard application data

| | |
|-------------------------|--|
| Max. travel speed | 100 m/min* |
| Max. load capacity | 80 kg* |
| Main rollers | diameter: 40 mm design: flanged / non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +80°C* |
| Applications | indoor / outdoor |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material




Program 0325

Compact **round or flat cable trolleys**, center-loading, made of hot-dipped galvanized steel for medium mechanical and dynamic loads.



Main applications:

- Bridge cranes
- Conveyor applications
- Electric hoists
- Transport systems

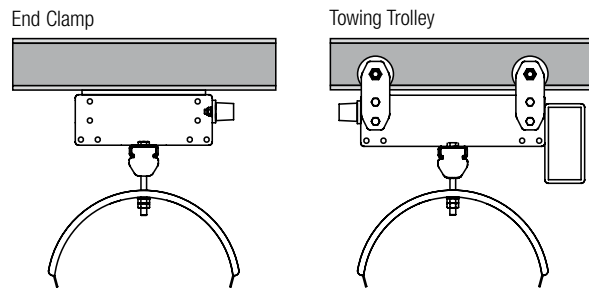

Standard application data

| | |
|-------------------------|--|
| Max. travel speed | 120 m/min* |
| Max. load capacity | 125 kg* |
| Main rollers | diameter: 50 mm design: flanged / non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +80°C* |
| Applications | indoor / outdoor |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material



Program 0330

The fastest and strongest **round** or **flat cable trolleys** for average loads. Made of hot-dipped galvanized steel for average speeds and higher loads with four-point suspension.

Main applications:

- Bridge cranes
- Conveyor systems
- Electric hoists
- Transport systems



High load capacity with extra large ball bearing diameters


Maintenance-free with anti-friction bearing rollers with permanent lubrication for higher loading capacities and speeds

Minimized shock load with robust rectangle rubber buffers


High protection against corrosion with hot-dipped galvanized steel parts

Maximum bending strength at low weight with one-piece rollformed trolley saddle in different widths and radii

End Clamp



Towing Trolley



Standard application data

| | |
|-------------------------|--|
| Max. travel speed | 150 m/min* |
| Max. load capacity | 200 kg* |
| Main rollers | diameter: 63 mm design: flanged / non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +80°C* |
| Applications | indoor / outdoor |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material





Program 0350

Cable trolley with single or multi layer side-loading cable supports for **flat cables**.

Suitable for medium mechanical and dynamic loads including traversing operation with lateral forces. Also suitable for short work cycles and high speeds.



High load capacity through extra large ball bearings with special seals for the toughest environmental conditions – maintenance-free with permanent lubrication

Precise tracking performance controlled by optimized running gear

Safe cable support even with large cable packages via a stable rubber clamp profile


Permanent protection against corrosion through stainless steel hardware

One-piece cable saddle welded to the center plate for high loads


Main applications:

- Bridge cranes
- Gantry cranes
- Stacker cranes (RMG's, RTG's)
- Ladle cranes
- Stacker and reclaimers
- Conveyor systems
- Transport systems

End Clamp




Towing Clamp



Standard application data

| | |
|-------------------------|--|
| Max. travel speed | 160 m/min* |
| Max. load capacity | 350 kg* |
| Main rollers | diameter: 50/63/80/100 mm design: flanged / non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +80°C* |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material





Program 0360

Cable trolley with single or multi layer side-loading cable supports for **round cables**.

Suitable for high mechanical and dynamic loads including traversing operation with lateral forces. Also suitable for short work cycles and high speeds.

Main applications:

- Scrap and ladle cranes in steel mills
- STS-container cranes
- Heavy-duty scrap cranes in steel mills
- High-speed conveyor systems

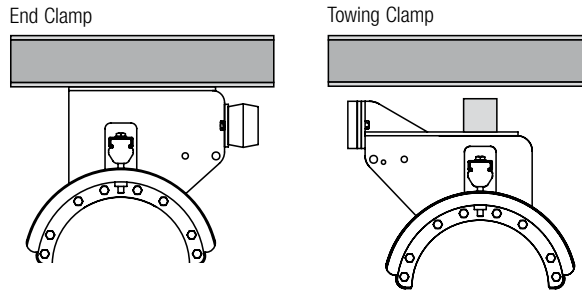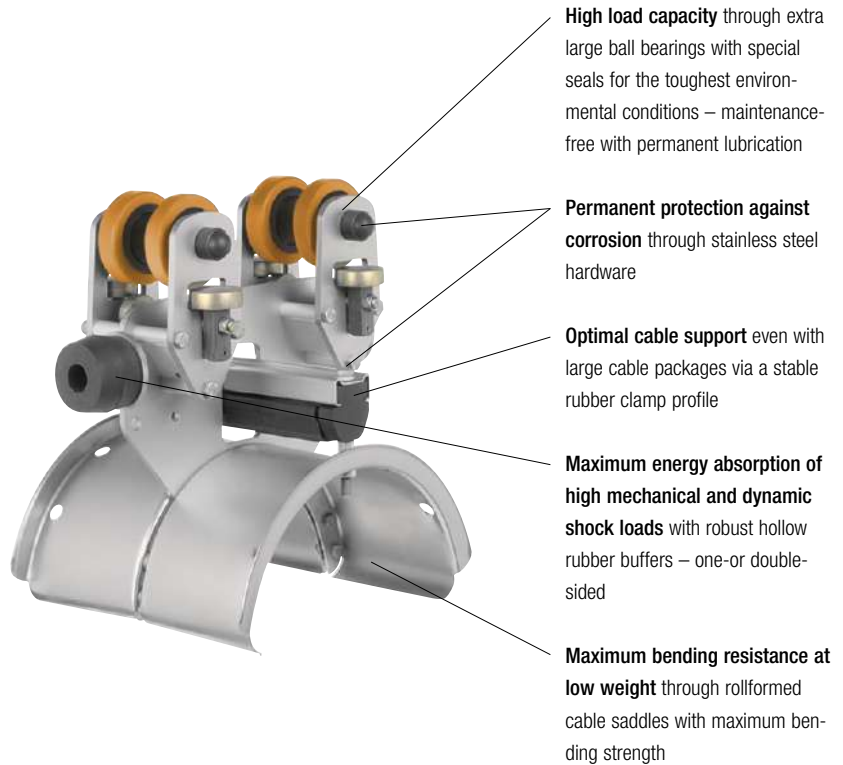

Standard application data

| | |
|-------------------------|--|
| Max. travel speed | 160 m/min* |
| Max. load capacity | 500 kg* |
| Main rollers | diameter: 50/63/80/100/112/125 mm design: flanged / non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +80°C* |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material






Program 0365

High-speed cable trolley with single layer side-loading cable supports for **round cables**.

Suitable for maximum mechanical and dynamic loads including traversing operation with strong lateral forces.

Also suitable for short work cycles and high work speeds.

For high speeds, in combination with a motorized cable trolley.

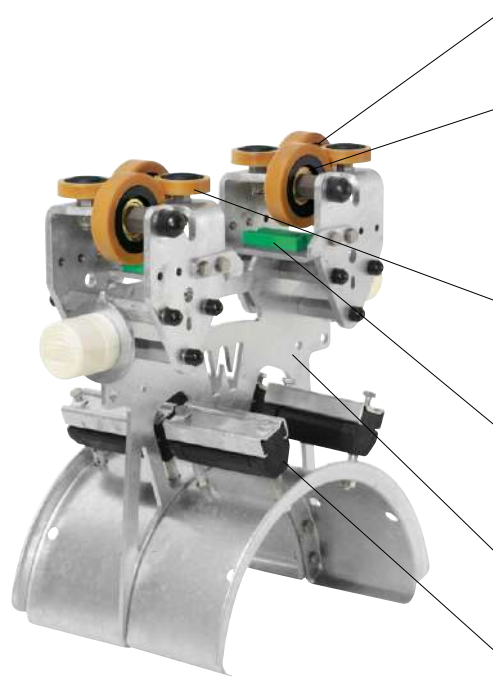

Smooth operation due to patented roller arrangement

Maximum load capacity through extra large ball bearings with special seals for the toughest environmental conditions – maintenance-free with permanent lubrication

Low wear and low noise emission even at high speeds with web-guided side guide rollers

Optimal guidance under maximum mechanical loads with a special polymer glide plate


Maximum stability with a one-piece, continuous center plate up to the saddle

Optimal cable support with a double V-lined cable clamp


Main applications:

- STS-container cranes
- Ladle cranes
- Heavy-duty grab cranes
- High-speed conveyor systems

End Clamp



Towing Clamp



Standard application data

| | |
|-------------------------|---|
| Max. travel speed | 300 m/min* (in combination with motorized trolleys) |
| Max. load capacity | 350 kg* |
| Main rollers | diameter: 112/125 mm design: non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +50°C |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |


*depending on roller size/roller material



Program 0370


Rugged cable trolley with multiple layer side-loading cable saddles for **flat cables**.

Suitable for maximum mechanical and dynamic loads including traversing operation with lateral forces. Also suitable for short work cycles and high speeds.

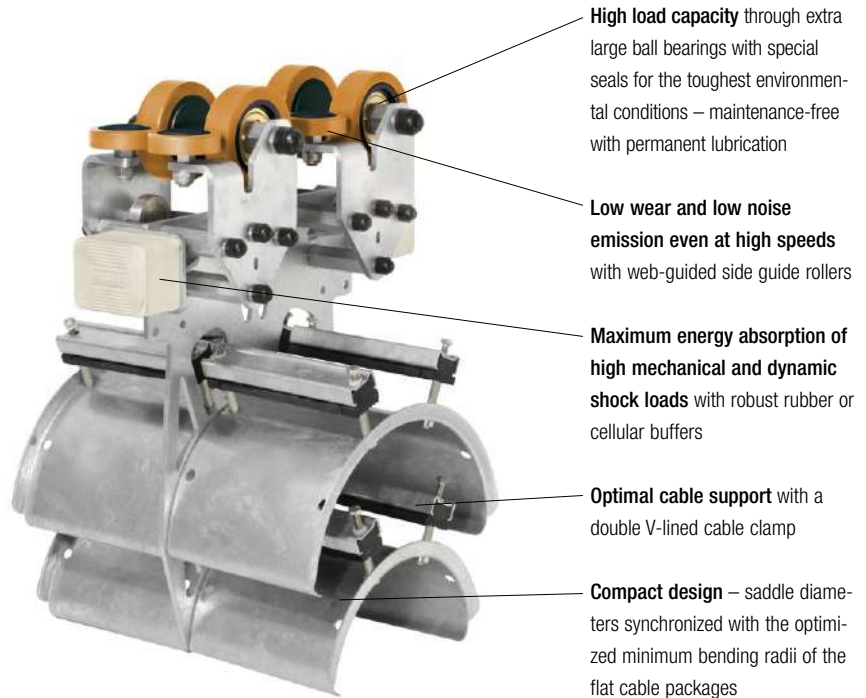

Main applications:

- Casting cranes
- Scrap cranes
- Ladle cranes
- High-speed conveyor systems
- Transport systems

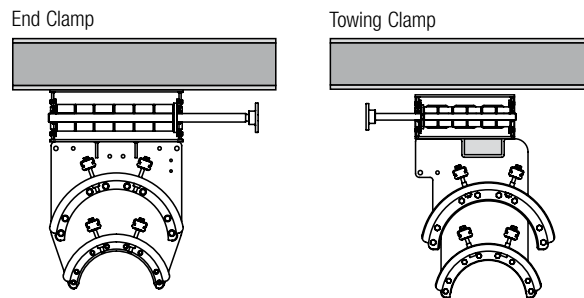

Standard application data

| | |
|-------------------------|---|
| Max. travel speed | 210 m/min* |
| Max. load capacity | 350 kg* |
| Main rollers | diameter: 125/160 mm design: non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +50°C |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material



Program 0375

Cable trolley with multi layer side-loading cable saddles for **round cables**. Suitable for maximum mechanical and dynamic loads including traversing operation and strong lateral forces. Suitable for short work cycles and high speeds – combinable with powered cable trolleys.



High load capacity through extra large ball bearings with special seals for the toughest environmental conditions – maintenance-free with permanent lubrication

Low wear and low noise emission even at high speeds with web-guided side guide rollers

Easy replacement of the rollers with individually removable side shields


Maximum stability with a one-piece, continuous center plate to the bottom saddle

Optimal cable support of the round cables with a double V-lined cable clamp


Main applications:

- STS-container cranes
- Scrap and ladle cranes in steel mills
- High-speed conveyor systems
- Transport systems

End Clamp



Towing Clamp



Standard application data

| | |
|-------------------------|---|
| Max. travel speed | 300 m/min* (in combination with motorized trolleys) |
| Max. load capacity | 800 kg* |
| Main rollers | diameter: 125/160 mm design: non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +50°C |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| Curved | optional |
| I-beam | parallel flange / tapered flange |

*depending on roller size/roller material




Motorized Festoon-Systems

The requirements of today's systems, especially in container handling, often exceed the physical limitations of conventional systems when it comes to speed, acceleration and cable package weight.

The application of motorized cable trolleys in combination with non-motorized cable trolleys allows for controlled acceleration and deceleration. This synchronization with the consumer makes it possible to increase the travel speeds of the entire system enormously. In addition, wear and maintenance work are reduced considerably, increasing the availability of the complete facility and minimizing the overall costs.



System sketch

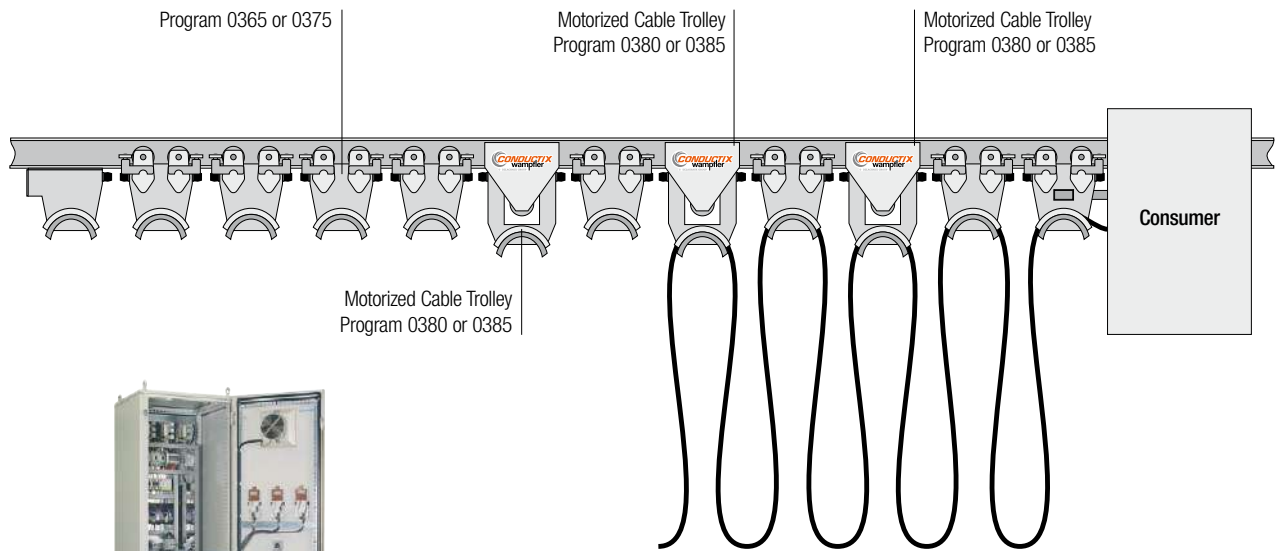

Complete frequency converter control including a control panel for a cable trolley system with 3 motorized cable trolleys by Conductix-Wampfler



Motorized main cable trolley with magnetic switch for back reach limit stops

Program 0380 | 0385

Motorized cable trolley for **round cables** with a patented compact drive (Progr. 0380) or with a gear motor (Progr. 0385).

The entire system consists of motorized cable trolleys, a frequency converter control for optimizing movement and cable trolleys from programs 0365 and 0375.

Main applications:

- High-speed STS-container cranes of all Panamax classes
- Special overhead bridge cranes
- Scrap and ladle cranes in steel mills
- High-speed conveyor systems
- Transport systems

Standard application data

| | |
|-------------------------|---|
| Max. travel speed | 300 m/min* |
| Max. load capacity | 800 kg* |
| Main rollers | diameter: 125/160 mm design: non flanged material: steel / Polyurethane, others on request |
| Ambient temperature | -30°C ... +50°C |
| Applications | indoor / outdoor sea climate |
| Design | hot-dipped galvanized steel stainless steel powder-coated painted |
| Resistance to chemicals | special designs on request |
| I-beam | parallel flange |



*depending on roller size/roller material





Perfect Interaction

The right equipment is just as important as the right tires on your car.

The perfect coordination of the equipment with the cable trolleys allows for the counterbalancing of unfavorable operating conditions.

Conductix-Wampfler Accessories are optimally coordinated with the appropriate cable trolley line.

Conductix-Wampfler Accessories increase the safety, the availability and the operational life of the entire festoon system.

Conductix-Wampfler offers the suitable equipment for every application – long-lasting and with the high quality you've come to expect!



The optimal roller for each application is a given at Conductix-Wampfler. Accordingly the available range of rollers is large and flexible.

Cable clamps

A controlled cable line in the loop prevents cables from twisting or overlapping. Cable clamps for flat and round cables considerably increase the operational life of the cables as well as the functional safety of the system.




Tension relief ropes

protect the cables from excessive tension. Suitable for every application with their various materials and designs.



Elastic damping devices

optimize the movement of the system at high speeds and protect the cables.



Whether it's hot-dipped galvanized or stainless steel, powder-coated or painted – Conductix-Wampfler always offers the right **surface**.

Service – tailor-made

Branch-specific competence

The scope and depth of the Conductix-Wampfler range of services is based on the requests and requirements of the customers. From planning to long-term agreements, anything is possible – according to your needs. Plus, the more complex the system layout and the expectations of operational life and operational safety, the more sense it makes to utilize our competent service team. Ask us!

Planning

- Determining the application parameters
- Selection of the optimal cable trolley technology and suitable cables – optimized to customer requirements, application parameters and environmental factors

Pre-assembly

- Mounting the cable trolleys on the transport beam
- Laying out and aligning the cables
- Installing the equipment
- Loading and transporting the festoon system to its site of operation

Final assembly & inspection

- Ensuring the correct assembly on site
- Complete installation and commissioning by trained and experienced personnel up to inspection

Maintenance & service

- Regular maintenance and inspections increase the operational life of the facility, ensuring its long-term availability
- Conductix-Wampfler service agreements: the “complete worry-free package”



The experts of Conductix-Wampfler accompany their customers from planning through pre-assembly right up to the on-site installation – anywhere in the world!



Your Applications – our Solutions

Festoon systems from Conductix-Wampfler represent only one of the many solutions made possible by the broad spectrum of Conductix-Wampfler components for the transport of energy, data and media supply systems. The solutions we deliver for your applications are of course based on your specific requirements. In many cases, a combination of several different Conductix-Wampfler systems can prove advantageous. You can count on all of Conductix-Wampfler's Business Units for hands-on engineering support – coupled with the perfect solution to meet your energy management and control needs.




Cable reels

Motorized reels and spring reels by Conductix-Wampfler hold their own wherever energy, data and media have to cover the most diverse distances within a short amount of time – in all directions, fast and safe.



Festoon systems

It's hard to imagine Conductix-Wampfler cable trolleys not being used in virtually every industrial application. They're reliable and robust and available in an enormous variety of dimensions and designs.



Conductor rails

Whether they're enclosed conductor rails or expandable single-pole systems, the proven conductor rails by Conductix-Wampfler reliably move people and material.



Non-insulated conductor rails

Extremely robust, non-insulated conductor rails with copper heads or stainless steel surfaces provide the ideal basis for rough applications, for example in steel mills or shipyards.



Energy guiding chains

The "Jack of all trades" when it comes to transferring energy, data, air and fluid hoses. With their wide range, these energy guiding chains are the ideal solution for many industrial applications.



Slip ring assemblies

Whenever things are really "moving in circles", the proven slip ring assemblies by Conductix-Wampfler ensure the flawless transfer of energy and data. Here, everything revolves around flexibility and reliability!



Inductive Power Transfer IPT®

The no-contact system for transferring energy and data. For all tasks that depend on high speeds and absolute resistance to wear.



Reels, retractors and balancers

Whether for hoses or cables, as classical reels or high-precision positioning aids for tools, our range of reels and spring balancers take the load off your shoulders.



Jib boom

Complete with tool transporters, reels, or an entire media supply system – here, safety and flexibility are key to the completion of difficult tasks.



Conveyor systems

Whether manual, semiautomatic or with Power & Free – flexibility is achieved with full customization concerning layout and location.

www.conductix.com

Conductix-Wampfler

has just one critical mission:

To provide you with energy and data transmission systems that will keep your operations up and running 24/7/365.

To contact your nearest sales office, please refer to:

[www.conductix.com/
contact-search](http://www.conductix.com/contact-search)



DELACHAUX GROUP